




Swedish Innovative Servo Motion
Engineering Since 1994

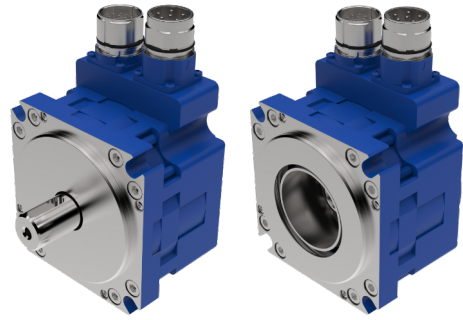

HDD/ICM 09J - Data sheet

Electric data

Value	Unit	Winding			
		Pa (400VAC)	Ma (230VAC)	Kb (110VAC)	Fa (48V)
Number of poles		20	20	20	20
Number of pole pairs		10	10	10	10
Inductance/Phase	mH	7.6	2.2	0.62	0.061
Resistance/Phase	Ohm	3.7	1.16	0.29	0.030
Resistance/Phase-Phase	Ohm	7.4	2.32	0.58	0.060
Back EMF/Phase-Phase RMS	Vs/rad	0.69	0.38	0.19	0.062
Back EMF @ 1000 rpm	V	72	39	20	6.5
Torque constant (RMS)	Nm/A	1.20	0.65	0.33	0.11
Max rail voltage	V	750	750	750	750
Recommended peak current	A	7	14	24	78
Torque at recommended peak current	Nm	7.35	7.35	7.35	7.35

For higher torques, see next page.

Mechanical data (resolver feedback)

Value	Unit	HDD09J		ICM09J	
		no brake	brake	no brake	brake
J	kgcm2	2.8	3.2	2.6	3.0
Mass	kg	2.4	3.0	2.1	2.7

Holding brake

Value	Unit	
Torque	Nm	9
J	kgcm2	0.4
Voltage	V DC	24
Power	W	12

Thermistors

Overheat protection consists of triple PTC thermistors. One on each phase.

R @ 25 C	100 to 350 Ohm
R @ 145 C	< 1650 Ohm
R @ 155 C	> 4 kOhm

Protection class

HDD motors comply with the requirements for IP 65. IP-67 is available on request.

Insulation class

The insulation system complies with the requirements of EEC LV Directive 73/23/EEC and 93/68/EEC. Test report E9911111E01.

Motor name structure


Type	Flange size	Stator length	Winding	Feedback	Power connector	Brake	Shaft key	Options
HDD	09	J	-Pa	-A	-A	-A	-A	-AAA

Type	HDD = shaft motor, ICM = internal coupling motor.								
Flange size	Approximate in cm. 09 = 92 mm.								
Stator length	HDD: E (shortest), J, N, Q, S (longest), ICM: J (shortest), N (longest).								
Winding	Suitable rail voltage at 3000 rpm.								
	<table border="1"> <tbody> <tr> <td>Pa</td> <td>560V</td> </tr> <tr> <td>Ma</td> <td>320V</td> </tr> <tr> <td>Kb</td> <td>180V</td> </tr> <tr> <td>Fa</td> <td>48V</td> </tr> </tbody> </table>	Pa	560V	Ma	320V	Kb	180V	Fa	48V
Pa	560V								
Ma	320V								
Kb	180V								
Fa	48V								
Feedback	See the feedback list on www.hddservo.com/product-options/								
Power connector	Many different pinouts available; see www.hddservo.com/product-options/								
Brake	A = no brake, D = holding brake. Data see above.								
Shaft key	A = shaft with key, B = shaft without key.								
Options	AAA = standard. For other options please contact HDD.								

Torque

Torque in Nm at 90°C temp rise (median temp rise, i.e. average between min and max temp for 25% cycle).

Duty cycle	100%	25%
100rpm	2.8	5.4
1000rpm	2.7	5.2
2000rpm	2.6	5.0
3000rpm	2.3	4.6

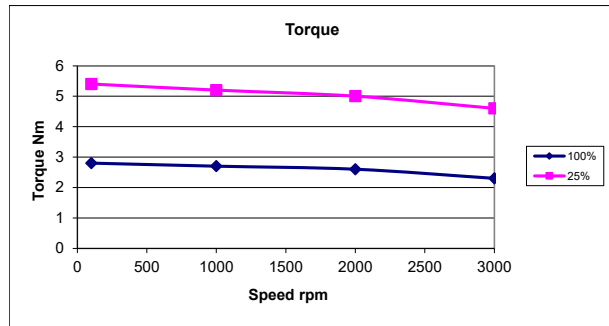

Current

Current at 90°C temp rise, in Ampere rms.

Winding	Pa	Ma	Kb	Fa	Pa	Ma	Kb	Fa
Duty cycle	100%				25%			
Locked rotor	2.2	3.9	7.8	24				
100rpm	2.5	4.3	8.6	28	4.4	7.7	15.4	49
1000rpm	2.5	4.3	8.6	28	4.4	7.7	15.4	49
3000rpm	2.3	4.0	8.0	28	4.2	7.3	14.5	47


Data were measured on an HDD 09J-Pa series motor mounted on a vertical 260 x 200 x 12 mm aluminum plate in free air, with a winding temperature rise of 90°C and driven by a commercially available inverter. Data for Ma and Fa windings are calculated.

Important note on peak torque and currents

The HDD/ICM motors are capable of high peak torques. The coupling inside the ICM is however limited to 15 Nm peak. At very high peak torques the permitted pulse time is very limited as a high current in a very small motor causes rapid temperature rise in the copper winding. The protection thermistor will not react fast enough to protect the winding during high pulse loads. A 10A rms current to a HDD09J-Pa will give some 11.5 Nm, but the copper winding temperature will increase with some 40°C per second. This is not a problem for short pulses of < 0.5 seconds as long as the rms value of the current is kept below some 2.7 A.


Torque at various commanded currents

HDD 09J-Pa at 560V rail voltage

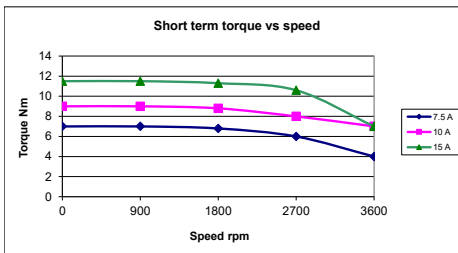

kT derating factor

Low speed, HDD09J-Pa

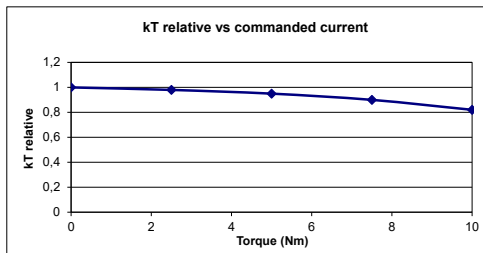

Maximum load on shaft at life expectancy 20,000 h (shaft motors only)

Maximal axial load (push): 350 N at 500 rpm, 100 N at 3000 rpm. Maximal axial load (pull): 50 N at all speeds. Maximal radial load at zero axial load is given by the curves below. For special cases please contact HDD for calculations.

